

GURIN





Instruction Manual

DHMD-210 Compact and Elegant Dehumidifier

www.gurinproducts.com

NAMES AND FUNCTION OF PARTS

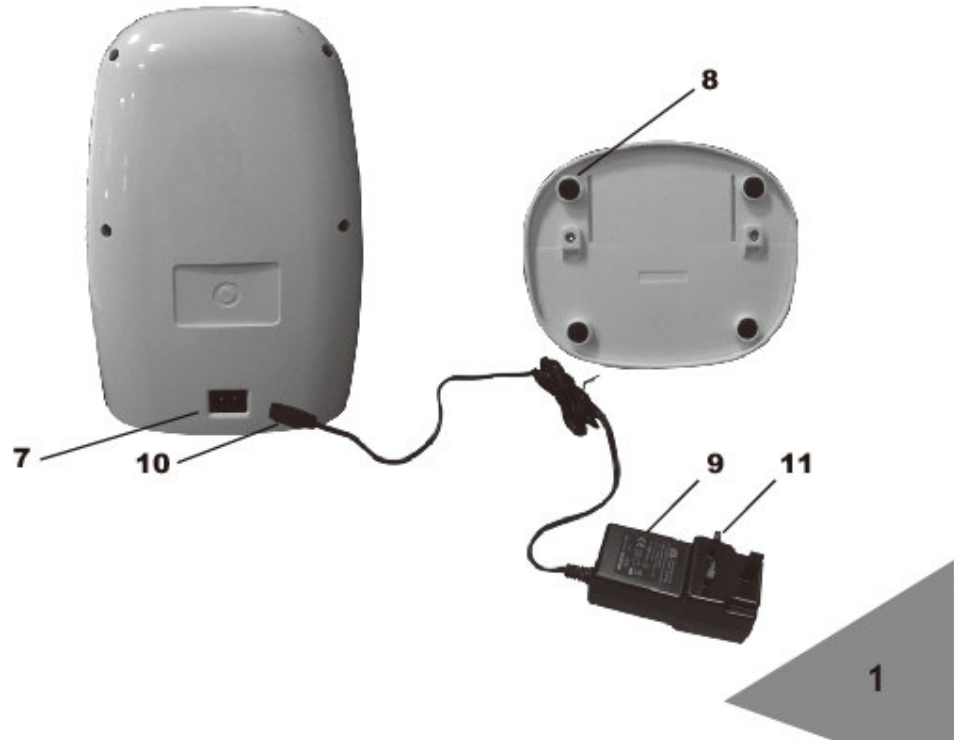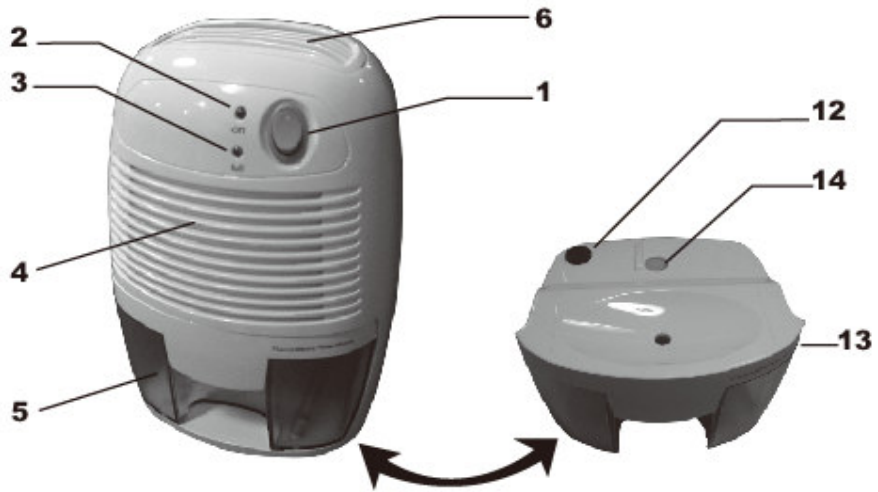

I. FEATURES

The compact dehumidifier uses light and quiet technology (no compressor). It is perfect for small rooms. Poor ventilation causes musty odor and fungus in wardrobes, cabinets or storage rooms etc. The Compact Dehumidifier eliminates this problem by keeping them free of unwanted moisture.

- (1) On/Off button
- (2) "On" Green LED
- (3) "Full" Yellow LED
- (4) Air inlet
- (5) Removable water tank
- (6) Dry air outlet
- (7) AC/DC power socket
- (8) Rubber feet
- (9) AC/DC power adapter
- (10) AC/DC power jack
- (11) AC plug with power cord
- (12) Water displacement hole
- (13) Water Tank
- (14) Hydraulic Cut-off


- To avoid electric shock. Do not open.
- Any repair work must be done by qualified Gurin technician.
- Specifications are subject to change.

II. SPECIFICATIONS

Capacity	:	Approximately 8 oz per day at 86 F, 80%RH
FAN	:	3" x 3" DC Brushless motor
Power adaptor	:	9V DC 2.5Amp
Power consumption	:	22.5W
Removable water tank	:	16 Oz Tank
Product Dimension	:	6"(W) x 8.5" (W) x 5" (D)

III.CONNECTIONS

1. After removing the packaging materials, there should be 2 items:
 - a. Compact dehumidifier
 - b. AC/DC Power adaptor
2. Plug the AC/DC power jack (10) of AC/DC power adaptor to the AC/DC power socket (7), and then connect the AC plug (11) of the AC/DC power adaptor to the appropriate main socket.
3. Press the "On/Off" button (1) to "On" position, the green LED will be turned on. The Compact Dehumidifier will begin to operate. You should able to feel the air blowing from dry air outlet (6) [as in Fig-1]
4. To switch off the unit, press "On/Off" button (1) to "Off" position, the Compact Dehumidifier will be turned off. [As in Fig.2]

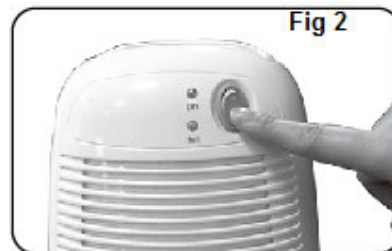

IV. REMOVABLE WATER TANK

When the water tank is full with approximately 16 ounces of water collected, the unit will be switched off automatically and the “Yellow” LED (Part No 3) will turn on (as in Fig 3)



To remove the water tank (part no 13), first switch off the Compact Dehumidifier,

- Press “On/Off” button to the “Off” position. Then, remove the water tank from the unit.
- **Pull the black washer (Part No 12) on top of water tank** and dispose off the water properly.
- Put the water tank back into the unit. To continue dehumidifying, press the “On/Off” button to “On” position again.

V.CLEANING

Before cleaning the unit, turn off the Compact Dehumidifier and unplug the AC plug from the main socket first. Use a piece of soft cloth to clean the surface of the product or use a brush to wipe the dust off the grills of the air inlet (part no 4). You should clear the dry air outlet (6) from time to time, (as in Fig.4)



VI. CAUTIONS

1. After having finished using the Compact Dehumidifier, the user should switch the unit off by pressing the “On/Off” button to “Off” position.
2. Avoid using the AC/DC power adaptor in wet or damp place, and position it in areas where the air ventilation is good.
3. Keep the front inlet grill and the top outlet free from air blocking materials such as clothing, plastic bag or papers.
4. If the unit has been properly connected and no power is flowing, have the AC/DC power adaptor and the Dehumidifier unit checked by a qualified electrician.
5. Always keep the unit at an up-night position to avoid water leakage.



Distributed by:
Gurin Products, LLC
2522 Chambers Road, Suite 100
Tustin, CA-92780

www.gurinproducts.com